

LEAKMASTER LV-Z

(MADE IN JAPAN)

FEATURES

1. EASY APPLICATION

As a moisture-cure one component type water-swelling sealant, general-use caulking guns can be used as with conventional sealants.

2. PHYSICAL PROPERTIES

After hardening, it has better physical properties than those of conventional putty type sealant.

3. WATER SWELLING

Swelling approx. 2times in volume as a result of its distilled water absorption and swelling mechanisms, LEAKMASTER LV-Z provides excellent water sealing property without losing its rubberlike elasticity.

CHARACTERISTICS

ITEM · UNIT	REFERENCE	TEST METHOD
Extrudability · sec	≤20	In house test (at 25°C)
Slump · mm	≤10	In house test (for 1 hour at 25°C)
Swelling Property · vol.%	85~200	In house test (after 2 days immersions at 25°C)

Note: Above values are not specific values.

Color: Gray

Appearance: Putty like


PACKING CONDITION

Item No.	LV-Z
Contents	320ml/cartridge
Unit	24 cartridges/carton



Curing time: 2 days (Summer), 3 days(Winter)

MAIN APPLICATIONS

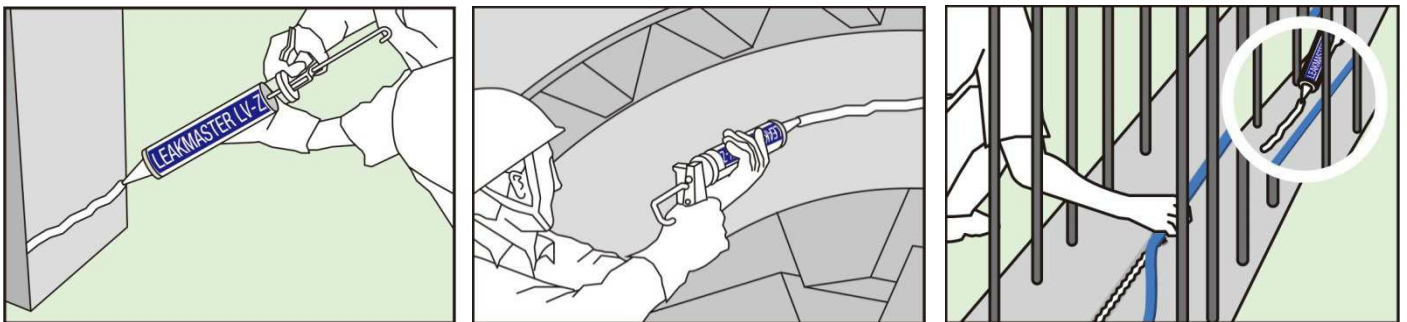

- Water sealing at vertical joints of cast in-situ concrete.
- Water sealing around H-section steel joints and bars.
- As an adhesive to the 1st site formed concrete before CJ installation, when the surface is rough.
- Precast Concrete •Waterproofing work •others

HOW TO USE



1) Break the moisture-proofing aluminum foil on the top of the cartridge



2) Cut the nozzle at the appropriate position

	Cut position	Size of extrusion	Length(m)
	Ⓐ	Approx. 5x20mm	3~5m
	Ⓑ	Approx. 10x20mm	1~3m

3) Average extrudable length and its nozzle cut position



4) Set the cartridge to a caulking gun



5) Apply LEAKMASTER LV-Z continuously without a break to the place to be sealed

IMPORTANT PRECAUTIONS

1. Please refer SDS before and during the use of LEAKMASTER LV-Z.
2. LEAKMASTER LV-Z contains solvent and may be ignited by sparks, heat or open flame before curing.
3. Ventilate adequately, Inadequate ventilation may cause eye/respiratory irritation, headache, dizziness and nausea.
4. Do not swallow and avoid eye/skin contact.
5. Keep out of reach of children.
6. Store in cool, dark and dry place below 90°F(32°C)
7. Do not apply to an external and/or surface position
8. Do not apply to places in contact with potable water.
9. Use at a temperature between 41°F(5°C) and 104°F(40°C).
10. When the surface is wet, LEAKMASTER LV-Z is not suitable.
11. After application, take adequate measure to prevent from exposure to rain, ground water and etc., before casting 2nd concrete or installing precast concrete.
12. Keep a minimum of 100mm concrete coverage on both sides of LEAKMASTER LV-Z position, when it is used for site formed concrete joints.
13. Use within its shelf life of 12 MONTHS after the production month shown on the cartridge.

Note: How to see the production month and year.

EX. A,B,C,D,E (D: month (X: October, Y: November, Z: December), E: the last digit of the year)

WARRANTY

All information contained herein is based on C.I.TAKIRON Corporation ("CITK")'s present state of knowledge of LEAKMASTER LV-Z when properly stored, handled and applied under normal conditions in accordance with CITK's instructions. The user of LEAKMASTER LV-Z must test LEAKMASTER LV-Z for suitability for the intended application and purpose before proceeding with the full application of LEAKMASTER LV-Z. CITK reserves the right to change the properties of LEAKMASTER CITK without notice. CITK warrants LEAKMASTER LV-Z to meet the technical properties on the current TDS if used as directed herein and within the shelf life. User determines suitability of LEAKMASTER LV-Z for intended use and assumes all risk.

NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. CITK SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. CITK SHALL NOT BE RESPONSIBLE FOR THE USE OF LEAKMASTER LV-Z IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.



Stratmore.

Leading solutions for construction.

The information contained in this data sheet, is to the best of our knowledge accurate and any recommendations or suggestions which may be made are without liability on our part, since the conditions of use are beyond our control. Users are urged to make their own assessment of our products under their own conditions and for their own requirements. Stratmore Construction Solutions Limited reserves the right to alter formulations without notice. Properties as stated were determined under controlled laboratory conditions. This data sheet may be updated without notice. Please ensure you have the latest copy. If you are a customer, then any contract with you is in accordance with our latest terms and conditions, which are available to download from our website. Where goods are acquired for business purposes, Parts 1 to 4 of the Consumers Guarantee Act 1993 will not apply. To the maximum extent permitted by law, we have no liability (whether statutory, in contract or tort, including negligence) to buyers, users or specifiers of our products for any physical, direct or indirect damage, economic loss or any other loss or costs caused or contributed by us or any of our agents or employees in respect of any goods or services supplied. Also to the maximum extent permitted by law, all conditions and warranties expressed or implied by statute or common law, equity, trade custom or usage or otherwise howsoever are excluded. If, notwithstanding the foregoing, Stratmore Construction Solutions Limited is found to have any liability, then it is agreed that the liability is nevertheless limited to the price of the relevant goods or services purchased from us.